

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 11/04		A1	(11) International Publication Number: WO 97/26772
			(43) International Publication Date: 24 July 1997 (24.07.97)
(21) International Application Number: PCT/GB97/00063 (22) International Filing Date: 10 January 1997 (10.01.97) (30) Priority Data: 9601178.8 20 January 1996 (20.01.96) GB (71) Applicant (for all designated States except US): NORTHERN TELECOM LIMITED [CA/CA]; World Trade Center of Montreal, 8th floor, 380 St. Antoine Street West, Montreal, Quebec H2Y 3Y4 (CA). (72) Inventor; and (75) Inventor/Applicant (for US only): CAVES, Keith [GB/GB]; 28 Sheering Lower Road, Sawbridgeworth, Herts CM21 9LF (GB). (74) Agent: RYAN, John, Peter, William; Nortel Patents, London Road, Harlow, Essex CM17 9NA (GB).			(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: TELECOMMUNICATIONS SYSTEM

1	6	3	1	5
E	LI	SN	CI	ECF

E = EXTENSION BIT
LI = LENGTH INDICATOR
SN = SEQUENCE NUMBER
CI = CHANGE INDICATOR
ECF = ERROR CORRECTION FIELD**(57) Abstract**

Telecommunications traffic is transported between first and second narrow band networks across an ATM network. Traffic from users of the first narrow band network is packetised into structured blocks within ATM cells. Each cell is provided with a respective control information field and with a header for routing the cells across the ATM network to the second narrow band network. The control information field incorporates a length indicator indicative of the size of the structured blocks within that cell whereby to control recovery of the user traffic from the cell.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

TELECOMMUNICATIONS SYSTEM

This invention relates to telecommunications networks and in particular to a system and method for asynchronous transfer mode (ATM) transmission of traffic.

5 BACKGROUND OF THE INVENTION

A recent development in telecommunications technology has been the introduction of the asynchronous transfer mode (ATM) transmission technique. The asynchronous transfer mode (ATM) technology is a flexible form of transmission which allows various types of service traffic,
10 e.g. voice, video or data, to be multiplexed together on to a common means of transmission, the traffic being carried in cells each having a header indicating its destination. The service traffic is adapted typically into 53 byte cells comprising 5 byte headers and 48 byte payloads such that the original traffic can be reconstituted at the far end of the ATM
15 network. This form of adaptation is performed in the ATM adaptation layer (AAL). The technique allows large volumes of traffic to be handled reliably and efficiently.

A limiting factor in the introduction of ATM is the difficulty of interfacing
20 new broad band ATM networks not only with existing narrow band networks, commonly referred to as legacy networks, but also with the newly emerging narrowband cellular and wireless networks. In an attempt to address the latter-mentioned part of this problem, ANSI committee T1S1.5 has recently issued a baseline document containing
25 proposals for a new ATM Adaptation Layer (AAL) that encapsulates and transports short user packets (called AAL-SDUs) inside an ATM cell stream. The new AAL is intended to be applicable to both fixed and variable length short packets and has been named 'Small Multiplexed ATM Adaptation Layer' (SMAAL). SMAAL is intended to support

-2-

applications such as low bit rate compressed voice, both with and without silence suppression, leading to both constant bit rate and variable bit rate user information. A consequence of these applications can be the unacceptably long voice packetisation delay that can occur in
5 filling a complete ATM cell with the resulting user information from a single source. The purpose of SMAAL is to permit multiple short packets of user information from one or more users to be multiplexed inside a single ATM cell, thereby alleviating the packetisation delay problems. While this facilitates the transmission of short packets within the ATM
10 network, it does not provide an effective means of interfacing with existing legacy networks, neither basic 64 kbit/s narrowband networks nor narrowband voice networks employing compression and silence suppression techniques.

15 SUMMARY OF THE INVENTION

The object of the invention is to minimise or to overcome these disadvantages.

20 A further object of the invention is to provide an improve apparatus and method for the transport of narrow band communications traffic.

According to the invention there is provided a method of transporting traffic between first and second narrow band networks across an ATM network, wherein ATM cells transporting the traffic are occupied by a
25 number of users, and wherein each cell is provided with a single control information field containing data for the recovery of the traffic at the second narrow band network.

According to the invention there is further provided a method of
30 transporting traffic between first and second narrow band networks across an ATM network, the method including multiplexing traffic from users of the first narrow band network into structured blocks within ATM cells, providing each cell with a respective control information field and a header, transmitting the cells across the ATM network to the second
35 narrow band network, and demultiplexing the user traffic from the transmitted cells, wherein each said control information field incorporates

-3-

a length indicator indicative of the size of the structured blocks within that cell whereby to define the demultiplexing process.

5 According to another aspect of the invention there is provided an arrangement for transporting traffic between first and second narrow band networks across an ATM network, the arrangement including means for multiplexing traffic from users of the first narrow band network into structured blocks within ATM cells, means for providing each cell with a respective control information field and a header, means for
10 transmitting the cells across the ATM network to the second narrow band network, and means for demultiplexing the user traffic from the transmitted cells, wherein each said control information field incorporates a length indicator indicative of the size of the structured blocks within that cell whereby to define the demultiplexing process.

15 The method and arrangement provide for the transport across ATM networks of narrow band 64 kbit/s channels as required for interworking between legacy networks. A single unified transport capability is made available to fulfil the requirements for the ATM trunking of narrow band
20 services, whether constant bit rate or piece wise constant bit rate (as for compressed voice with silence suppression) in character.

BRIEF DESCRIPTION OF THE DRAWINGS

25 An embodiment of the invention will now be described with reference to the accompanying drawings in which:-

Figure 1 is a schematic diagram illustrating the SMAAL fields and formats;

30 Figure 2 shows the control information field employed in the SMAAL protocol of figure 1;

Figure 3 is a schematic diagram of a telecommunications network structure according to an embodiment of the invention;

35

-4-

Figure 4 shows a control information field used in the transmission protocol of the network structure of figure 3 to facilitate the transport of multiple multiplexed 64 kbit/s narrowband channels in a single ATM connection;

5

Figure 5 is a schematic diagram illustrating the transport of multiple structured blocks in single ATM cells across the network of figure 3;

10

Figure 6 is a schematic diagram illustrating the transport of single structured blocks in multiple ATM cells across the network of figure 3 ; and

15

Figure 7 shows a control information field used in the transmission protocol of the network structure of figure 3 to facilitate the transport of single narrowband channels carrying compressed and/or silence suppressed voice information per single ATM connection.

20 DESCRIPTION OF PREFERRED EMBODIMENT

Reference is first made to figures 1 and 2 which are introduced for comparative purposes and as an aid to the understanding of the invention. Figure 1 shows the format and composition of the fields of SMAAL. It also illustrates the multiplexing of short packets from multiple users into a SMAAL cell stream. The three information packets (AAL-SDUs) from users A, B and C are appended each to a header called the Control Information Field (CIF) before being multiplexed into the cell stream of a single ATM connection. For efficiency, information from User B is split to straddle two cell payloads; in this case, the second half of the information loaded into the second cell payload also carries a CIF header. At the end of the second cell payload, more than two octets remain following the information from User C. Since there is no more information available to send at this time, the remaining octets are filled by a CIF field plus Pad characters, labelled 'X'. Finally, the ATM cell payloads are encapsulated into ATM cells.

35

-5-

The details of the control information field or CIF are shown in Figure 2. The meanings of the individual fields are as follows :

- the Extension (E) bit is reserved for future use.
- 5 • the Length Indicator (LI) of 6 bits points to the end of the current packet so that its value is equal to the length of the packet in octets. A value of LI greater than 46 indicates that the end of the current packet lies in the next cell, where the leading CIF contains the length of the remaining part of the packet.
- 10 • the Logical Link Number (LLN) of 4 bits allows user information from up to 16 sources to be associated with the correct users.
- the 5 bit Error Correcting Field (ECF) contains a 4-bit CRC plus a Parity bit. The ECF permits either single bit error correction or error detection to be performed over the CIF.
- 15 The rules pertaining to the use of Pad characters at the end of a cell payload are as follows :
 - with only one octet remaining, fill it with Pad character X.
 - with exactly two octets remaining, fill them with CIF with LI = 0.
 - with more than two octets remaining and no user information waiting
 - 20 to be sent, fill them with CIF with LI = 0 plus Pad characters X.

25 The present version of SMAAL as described briefly above permits the transport of user information in the form of short fixed or variable length packets, say from 3 to 36 octets in length, between narrow band networks across ATM trunk networks.

30 Referring now to figure 3, this illustrates a network structure providing interworking between narrow band networks via an ATM network, e.g. a public network. In the network structure of figure 3, narrow band channels are transported across the public ATM network between pairs of Interworking Functions (IWF) each providing an interface between the respective narrow band network and the ATM network. For maximum efficiency and cost effectiveness, ATM connections carrying multiplexed

-6-

information from multiple users may be set up between the IWF pairs for this purpose.

5 If we consider the information typically originating from legacy 64 kbit/s narrow band networks, this is in the form of short packets of 1 octet in length. We have found that the transport of such information between 64 kbit/s narrow band networks and other narrow band networks can be achieved by the transport between IWFs of multiple octets multiplexed on to a single ATM connection. We have also found that, in order to
10 transport such information, there is no need to carry the overhead of a CIF per packet. This is because the octets originating from a 64 kbit/s narrow band network may be carried in structured blocks. Thus, if 83 channels need to be transported between IWFs, one octet per channel can be multiplexed into the ATM cell stream every 125 microseconds to
15 form a repetitive 83 octet structure. By using this structure we require a single control information field (CIF) per ATM cell to recover the individual channels at the destination IWF. This control information field is shown in figure 4. The LI field in our CIF points to the end of the structure block. A value of all ones in the LI field indicates that the end
20 of the structure was not in the current cell.

Operation of structured information transfer in the manner described above with reference to figures 3 and 4 preferably requires a sequence number to be associated with each cell payload, so that missing and
25 misinserted cells can be detected. Since our structured transfer has no need for the conventional CIF's Logical Link Number field (LLN), 3 bits of the LLN may be allocated to convey a sequence number (SN).

30 In a further modification, the number of channels being transported may be varied dynamically. This is effected via a signalling exchange between IWFs in order to agree on the parameters of the new structure, following which an in band change indicator synchronises the exact instant of structure change. To achieve this, the fourth bit of the LLN field can be used as a change indicator, a change in the sense of this bit
35 being used to convey the time of structure change.

-7-

Figure 5 shows an example of the use of our transmission technique to transport multiple 64 kbit/s-based block structures per ATM cell, with the size of the block structure equal to 6 in this case. Every 125 microseconds, a block of 6 octets is collected, one from each of the 6 channels to be transported, and grouped in sequence in the ATM cell payload. In the figure, only channels 1 and 6 are shown, for clarity. As shown in the example, the cell payload thus holds 7 full blocks of 6 octets, plus octets from the 8th block belonging to channels 1 to 4. The LI value in the CIF indicates that the end of the first structure block occurs at octet number 6. Since four octets of the 8th structure block appear in the payload shown in figure 5, only two octets of the 8th structure block will appear in the next cell payload so that an LI value of 2 would be indicated.

Figure 6 shows an example of the use of our transmission technique to transport a single 64 kbit/s-based block structure in more than one ATM cell, with the size of the block structure equal to 57 in this case. Every 125 microseconds, a block of 57 octets is collected, one from each of the 57 channels to be transported, and grouped in sequence in the payloads of either two or three ATM cells. In the figure, only channels 1 and 57 are shown, for clarity. As shown in the example, the first cell payload holds 46 octets of the 57 octet structure block. The LI value in the CIF is set to 64 indicating that the end of the structure block does not occur in this cell. Since the remaining eleven octets of the structure block appear in the following cell payload, an LI value of 11 indicates where the end of the 57 octet block structure occurs.

The method described above may be adapted to handle traffic originating from narrow band voice networks which employ optional compression and silence suppression techniques. Typically, such networks operate in a default mode at 64 kbit/s but when using compression, rates of 32, 24 and 16 kbit/s are common. The resulting compressed voice traffic is of constant bit rate in character but becomes piecewise constant bit rate when silence suppression is invoked. Often, these networks arrange for an in band negotiation procedure between voice terminals subsequent to the connection set-up phase of a call, in

-8-

order to agree the characteristics of any compression and/or silence suppression to be used during voice information transfer. Occasionally, the network may arrange to vary these characteristics on existing calls automatically to reflect the current congestion within the network. We

5 have found that the transport of such variable constant bit rate and piecewise constant bit rate information between IWFs can be achieved conveniently by the transport of a single narrow band channel per ATM connection. With silence suppression, in which transmission is halted during the gaps between speech bursts, the extent of the fill of a given

10 cell payload may be variable and unpredictable. In addition, the amount of time required to fill the payload of an ATM cell with information from a single voice channel will vary depending on the degree of compression being used and to limit this variability, partial cell fill may be required in certain circumstances. To achieve this capability we provide a single

15 control information field (CIF) per ATM cell to recover the information from individual channels at the destination IWF. This control information field is shown in figure 7. The LI field indicates the end of the voice information being carried by the cell payload.

20 Operation of single channel information transfer in the manner described above with reference to figures 4 and 7 preferably requires a sequence number to be associated with each cell payload, so that missing and misinserted cells can be detected. Since our single channel transfer has no need for the conventional CIF's Logical Link Number field (LLN), 3

25 bits of the LLN may be allocated to convey a sequence number (SN).

In a further modification, the cell payload being transported between IWFs may carry either voice information or in band signalling. In band signalling may be used as described previously at the beginning of a call

30 to agree the compression characteristics for the call. It may also be used during the call to alter the call characteristics or to convey background noise levels to be used at the destination IWF during periods of silence suppression or for other purposes. This alternate cell payload use is effected by means of an indicator carried within the control

35 information field which indicates whether a cell payload carries voice information or inbound signalling information. To achieve this, the fourth

-9-

bit of the LLN field can be used as an information/signalling indicator, a value of zero indicating voice information and a value of one indicating signalling information.

- 5 The transmission techniques described above make it possible to use the same basic ATM Adaptation Layer for the transport across an ATM trunk network of multiple narrow band services, including :
- constant bit rate compressed voice services at multiple bit rates
 - piece wise constant bit rate voice services with silence suppression,
10 again with multiple bit rates
 - constant bit rate 64 kbit/s and $n \times 64$ kbit/s narrow band services.

Although the transmission technique has been described with reference to the transport of traffic between narrow band legacy networks, it will be
15 appreciated that it is not limited to that particular application but is of general application in the ATM transmission field.

CLAIMS

1. A method of transporting traffic between first and second
5 narrow band networks across an ATM network, wherein ATM cells transporting the traffic are occupied by a number of users, and wherein each cell is provided with a single control information field containing data for the recovery of the traffic at the second narrow band network.
- 10 2. A method of transporting traffic between first and second narrow band networks across an ATM network, the method including multiplexing traffic from users of the first narrow band network into structured blocks within ATM cells, providing each cell with a respective control information field and a header, transmitting the cells across the
15 ATM network to the second narrow band network, and demultiplexing the user traffic from the transmitted cells, wherein each said control information field incorporates a length indicator indicative of the size of the structured blocks within that cell whereby to define the demultiplexing process.
- 20 3. A method as claimed in claim 2, wherein the control information field is provided with a sequence number whereby to identify missing or misinserted cells.
- 25 4. A method as claimed in claim 2 or 3, wherein the control information field is provided with a change indicator indicative of changes in the number of users occupying the cell.
- 30 5. An arrangement for transporting traffic between first and second narrow band networks across an ATM network, the arrangement including means for multiplexing traffic from users of the first narrow band network into structured blocks within ATM cells, means for providing each cell with a respective control information field and a header, means for transmitting the cells across the ATM network to the
35 second narrow band network, and means for demultiplexing the user traffic from the transmitted cells, wherein each said control information

-11-

field incorporates a length indicator indicative of the size of the structured blocks within that cell whereby to define the demultiplexing process.

6. An arrangement as claimed in claim 5, wherein the control
5 information field is provided with a sequence number whereby to identify missing or misinserted cells.

7. An arrangement as claimed in claim 6, wherein the control
information field is provided with a change indicator indicative of changes
10 in the number of users occupying the cell.

Fig. 1.

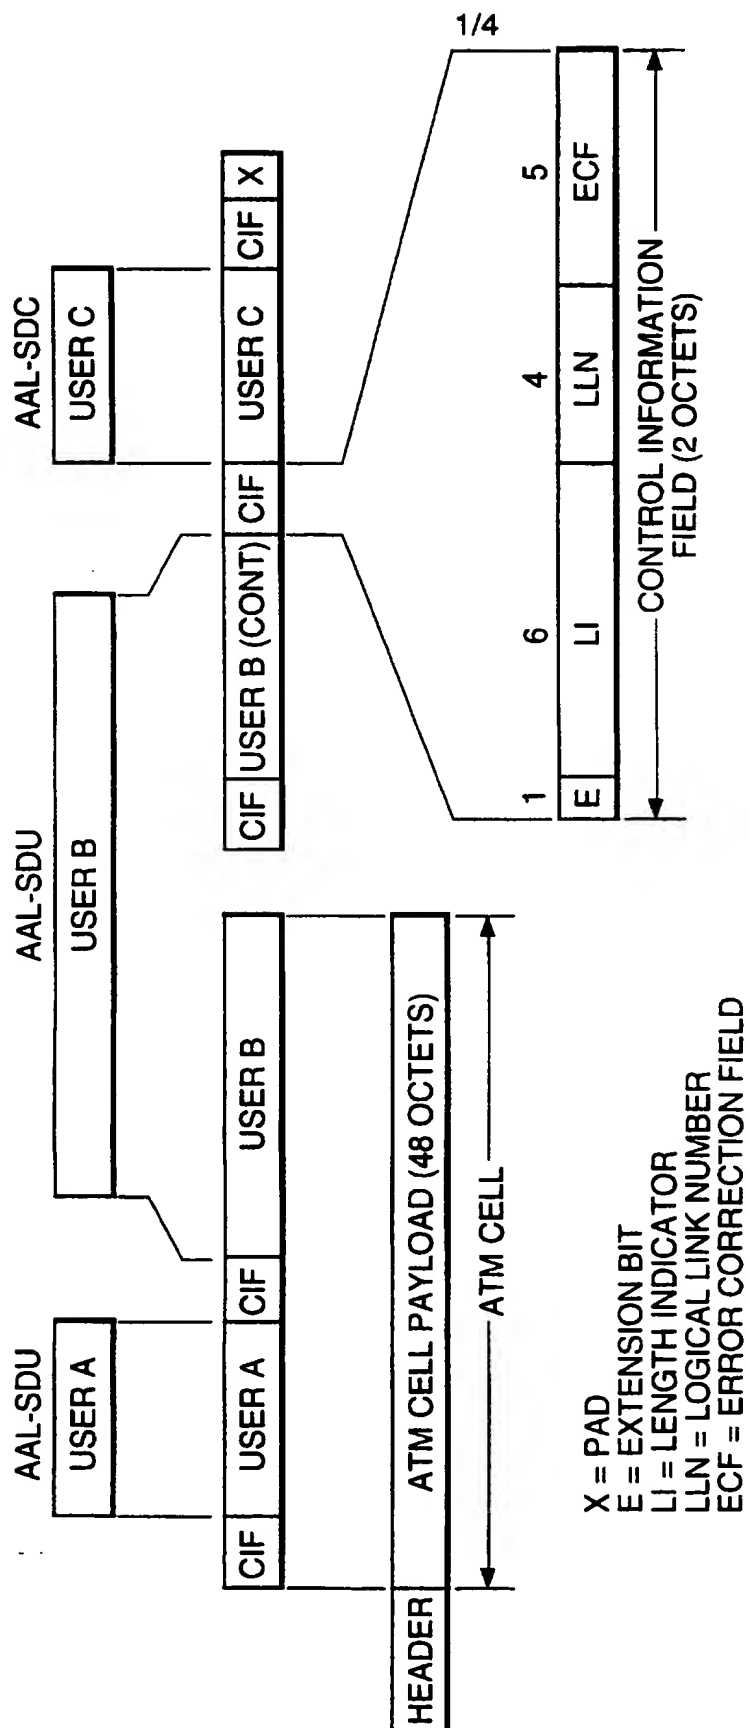
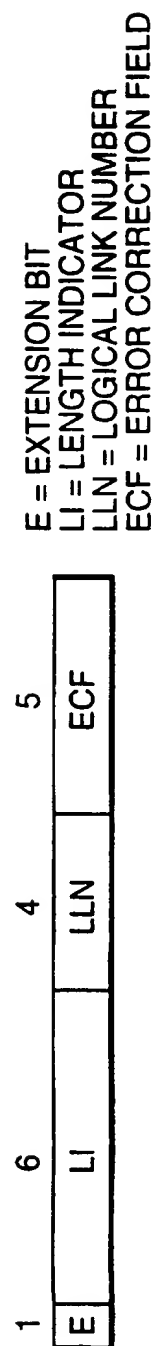


Fig. 2.



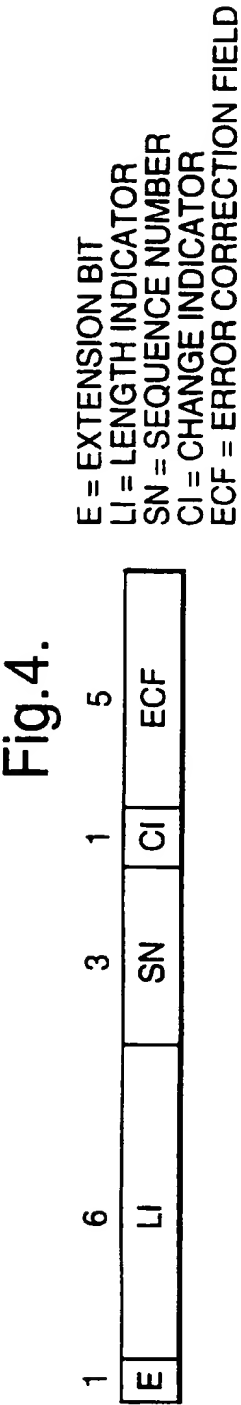
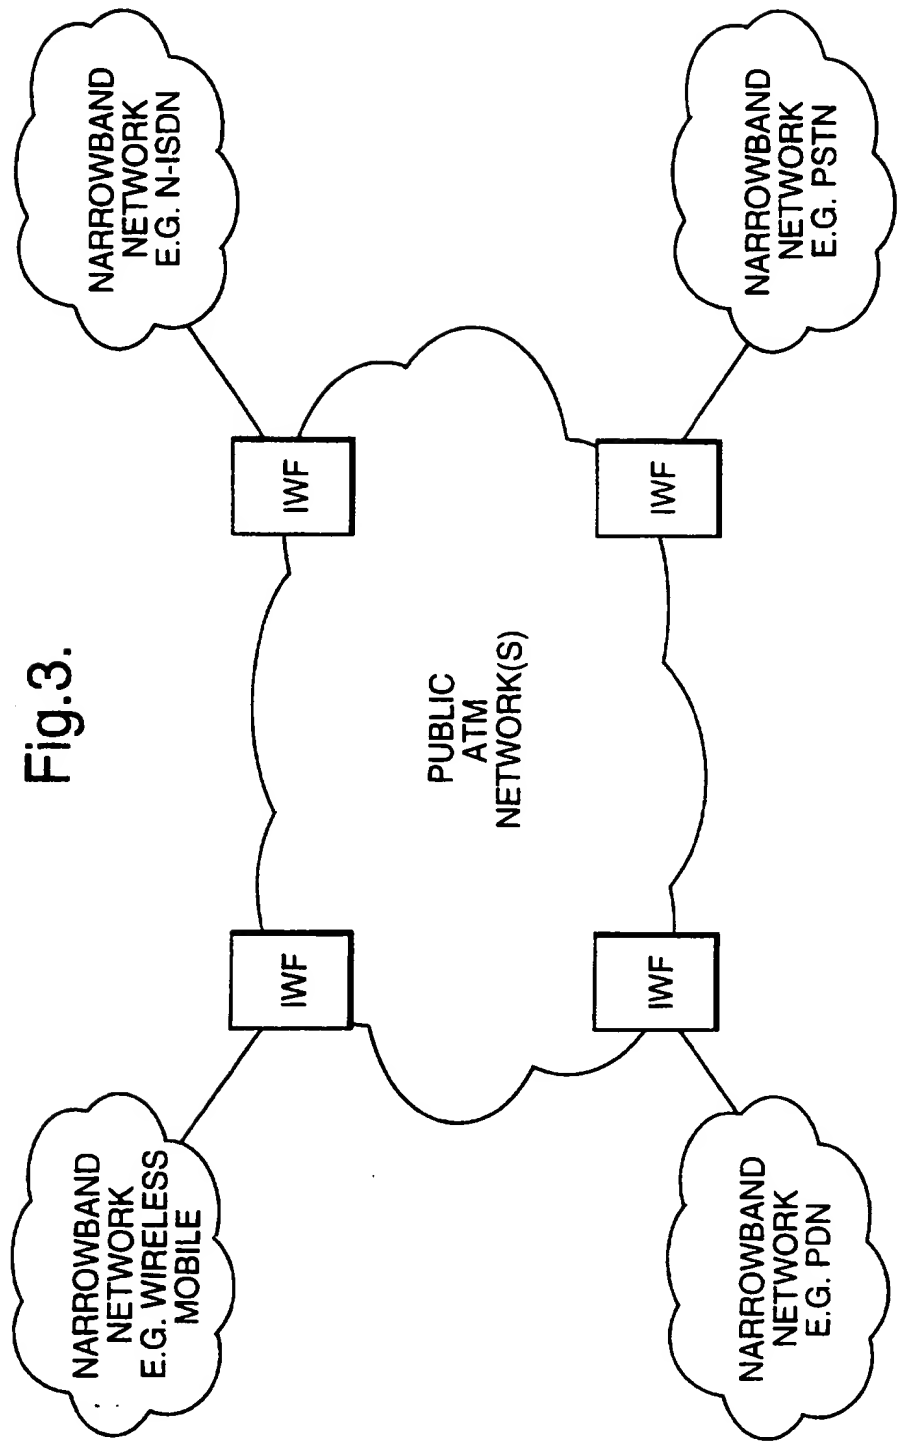


Fig.5.

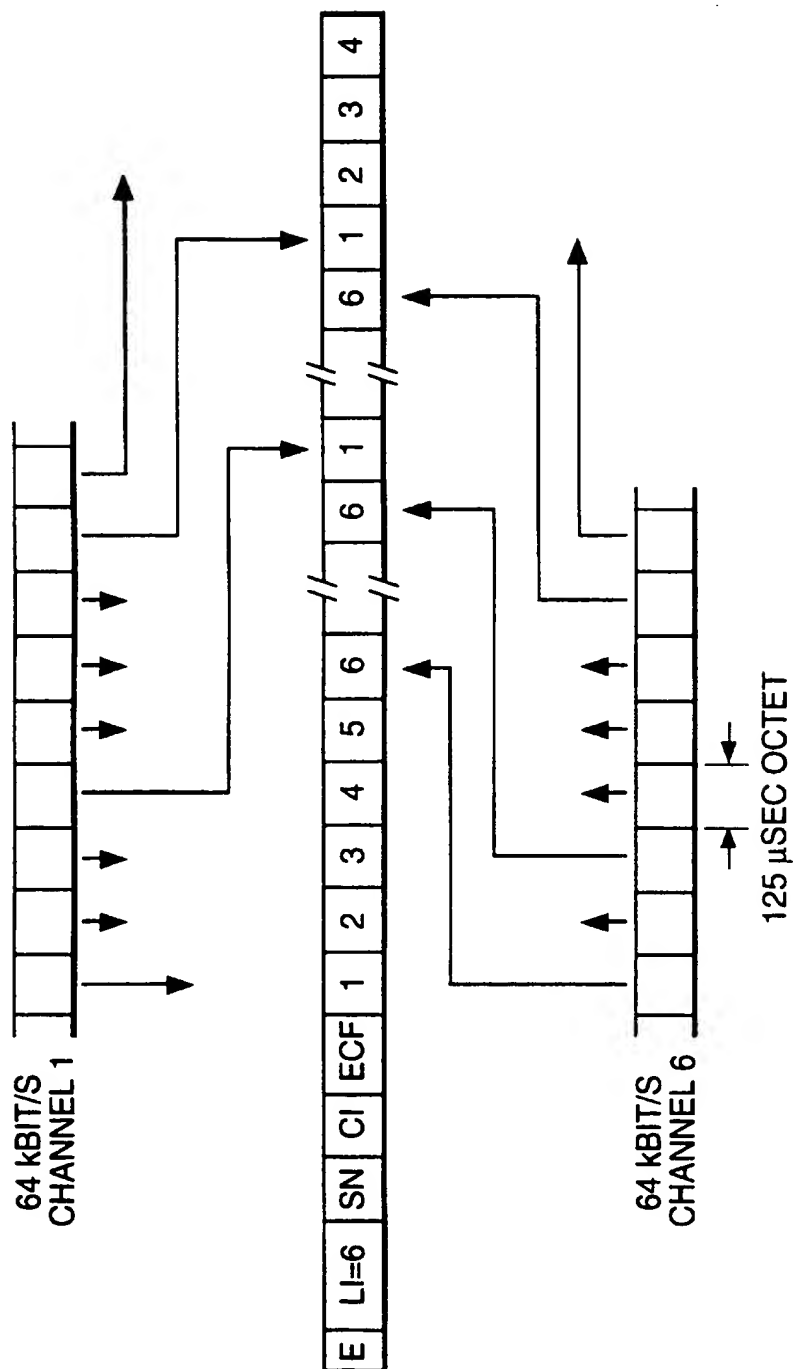


Fig.6.


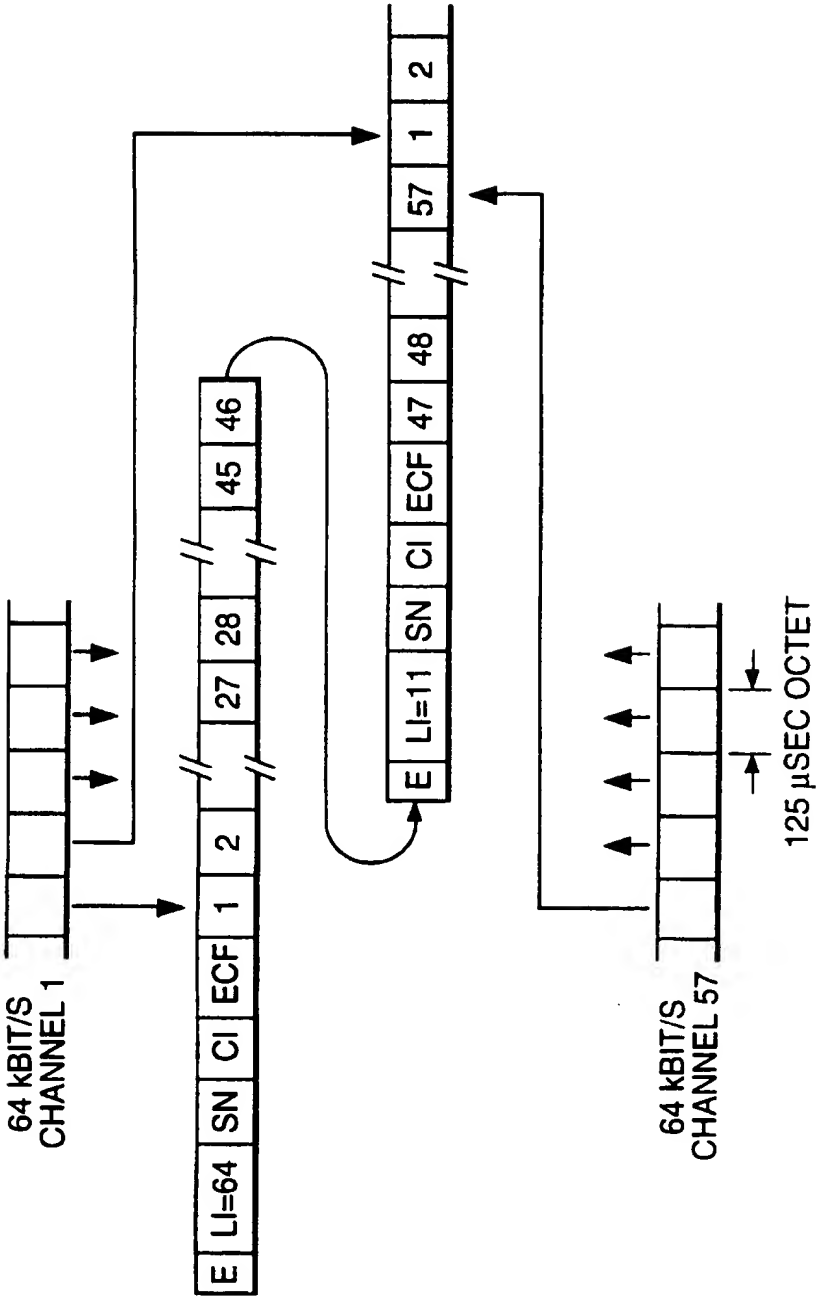


Fig.7.

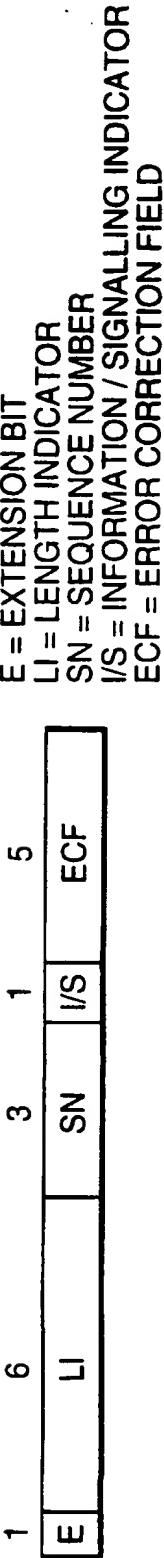

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/GB 97/00063

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H04Q11/04		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 H04Q		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 225 714 A (BRITISH TELECOMM) 16 June 1987 see claims 1,3-5 ---	1,2,5
Y	COMMUNICATIONS TECHNOLOGY FOR THE 1990'S AND BEYOND, DALLAS, NOV. 27 - 30, 1989, vol. 3 OF 3, 27 November 1989, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 1921-1925, XP000091280 COVINGTON W O ET AL: "VOICE TRANSPORT OF AN ATM BROADBAND NETWORK" see page 1924, left-hand column, line 61 - right-hand column, line 30; figure 6 --- -/--	1,2,5
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"Z" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">11 April 1997</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">21.04.97</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Veen, G</div>

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 97/00063

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>NETWORKING IN THE NINETIES, BAL HARBOUR, APR. 7 - 11, 1991, vol. 2, 7 April 1991, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 781-790, XP000223404 OHTA H ET AL: "A TECHNIQUE TO DETECT AND COMPENSATE CONSECUTIVE CELL LOSS IN ATM NETWORKS" see page 782, left-hand column, line 19 - page 786, left-hand column, line 15 -----</p>	3,6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/GB 97/00063

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0225714 A	16-06-87	AU 586292 B	06-07-89
		AU 6448786 A	30-04-87
		CA 1265860 A	13-02-90
		JP 2521444 B	07-08-96
		JP 62128639 A	10-06-87
		US 4774706 A	27-09-88
